Fast grip!

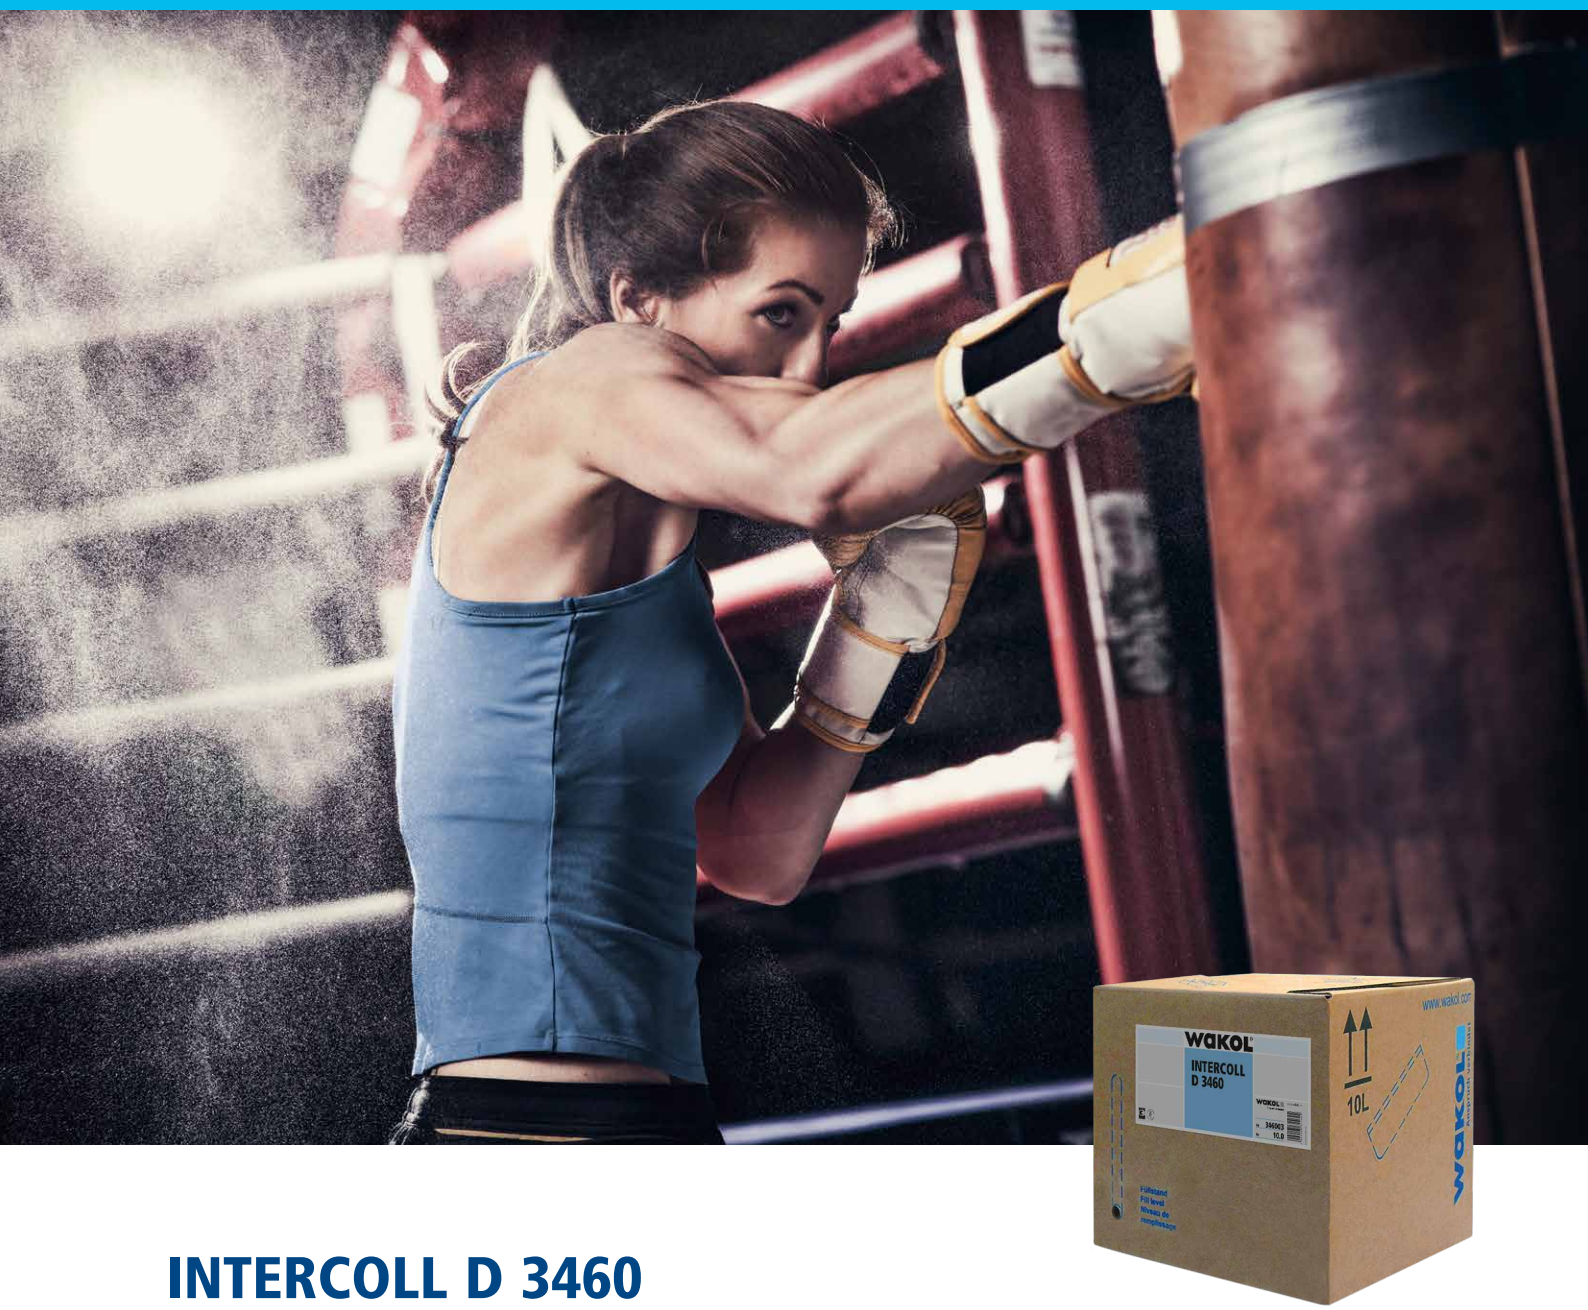

INTERCOLL D 3460
Spray adhesive for foams

Very fast – extremely high initial tack
Quick – no airing time required
Easy – single-component, bag-in-box packaging
User-friendly – genuine alternative to solvent-containing adhesives

Product:

WAKOL®
Anspruch verbindet

INTERCOLL D 3460 – high-performance spray adhesive for foams

One product for all purposes

INTERCOLL D 3460 bonds all usual padding materials, e.g. foam, fleece, cover fabrics, wood, hard fibre and cardboard. The water-based polychloroprene-latex adhesive is also ideal for more difficult substrates such as non-woven fabrics, visco foam, etc.

Very fast, high initial tack

INTERCOLL D 3460 enables a high working speed thanks to its high initial tack. This is achieved with a new formulation concept, whereby the adhesive already coagulates in the spray jet, thus no airing time is required. INTERCOLL D 3460 is a high-performance contact adhesive, which leads to immediate material fracture. But it can also be used as a single-sided adhesive, thus allowing for corrections. Based on these properties, INTERCOLL D 3460 represents a genuine alternative to solvent-containing adhesives.

Low consumption

INTERCOLL D 3460 can be used at a low spraying pressure, thus reducing the overspray and optimising consumption. Despite the low spraying pressure, a high initial tack is achieved compared with commercially available single-component water-based foam adhesives.

Simple application, as single-component

The product can be applied using the "free-flow" method. To carry the material and to build up the necessary material pressure in the gun, no special complicated equipment is required. The practical packaging units can simply be placed on a shelf at least one metre above application height. The hydrostatic pressure resulting from the height difference is entirely sufficient

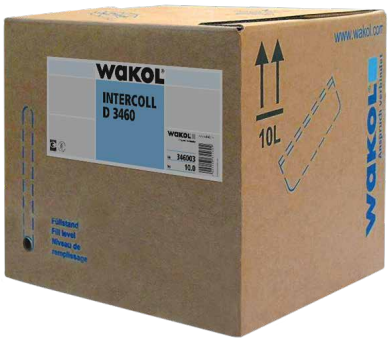

OEKO-TEX®
CONFIDENCE IN TEXTILES
ECO PASSPORT
16.0.85906 HOHENSTEIN
Textile chemicals. Tested and verified.
www.oeko-tex.com/ecopassport

TÜVRheinland®
ZERTIFIZIERT
Emissionsgeprüft
Nach Aushärtung
Regelmäßige Produktüberwachung
www.tuv.com
ID 1111217155

for the required material quantity. In comparison to the mixed two-component adhesive, INTERCOLL D 3460 contains more solid material and therefore has a lower water content. This adds a drying benefit.

User-friendly

INTERCOLL D 3460 is odourless. It is easy to remove from the fingers. Adhesive on floorings does not create any slippery surfaces.

High quality for the end product

INTERCOLL D 3460 has a very high ageing resistance, which in turn leads to the long life of the end product. The environmental friendliness is certified with the TÜV certificate "emissions-tested" and the Eco Passport.

Please always observe the technical information before processing.

Wakol GmbH
Bottenbacher Straße 30
D-66954 Pirmasens
Tel. +49 6331 8001 131
Fax +49 6331 8001 890
www.wakol.com

wakol®
Anspruch verbindet

www.mono-d.de
D 9004503 05/19 99216101